

## HDS PPB 4" Midwoofer



Type Number: 830854

### Features:

The new High Definition Sound (HDS) PPB series is the culmination of Peerless working in close partnership with end users of Peerless-based audio products. With a deep understanding of customer requirements and needs, Peerless developed the proprietary and highly advanced Polypropylene Black (PPB) cone material used in the HDS PPB Series, creating a stiff but still dampened cone that remains stable even under the greatest sound pressures.



Driver Highlights: Shielded for television and PC applications, PPB diaphragm, 26 mm coil, AL, Shielded

[Go to Application Notes.](#)

[Go to Architecture Notes](#)

### Specs:

#### Electrical Data

Nominal impedance	Zn	8	ohm
Minimum impedance	Zmin	5.6	ohm
Maximum impedance	Zo	30.3	ohm
DC resistance	Re	5.3	ohm
Voice coil inductance	Le	0.6	mH

#### T-S Parameters

Resonance Frequency	fs	75.7	Hz
Mechanical Q factor	Qms	2.66	
Electrical Q factor	Qes	0.56	
Total Q factor	Qts	0.46	
Force factor	Bl	5.1	Tm
Mechanical resistance	Rms	1.05	Kg/s
Moving mass	Mms	5.9	g
Suspension compliance	Cms	0.76	mm/N
Effective cone diameter	D	8.4	cm
Effective piston area	Sd	55	cm <sup>2</sup>
Equivalent volume	Vas	3.2	ltrs
Sensitivity (2.83V/1m)		86.8	dB
Ratio BL/√(Re)		2.2	
Ratio fs/Qts	F	165	

#### Power handling


100h RMS noise test (IEC)	--	W
Long-term Max Power (IEC 18.3)	--	W
Max linear SPL (rms) @ power	--	dB/W
Short Term Max power (IEC 18.2)	--	W

#### Voice Coil and Magnet Parameters

Voice coil diameter	26	mm
Voice coil height	12	mm
Voice coil layers	2	
Height of the gap	6	mm
Linear excursion +/-	3	mm
Max mech. excursion +/-	--	mm
Flux density of gap	--	mWb
Total useful flux	0.7	mWb
Diameter of magnet	72	mm
Height of magnet	25	mm
Weight of magnet	0.39	Kg

Notes:  
IEC specs refer to IEC 60268-5 third edition.  
All Tymphany products are RoHS compliant.

## Frequency:

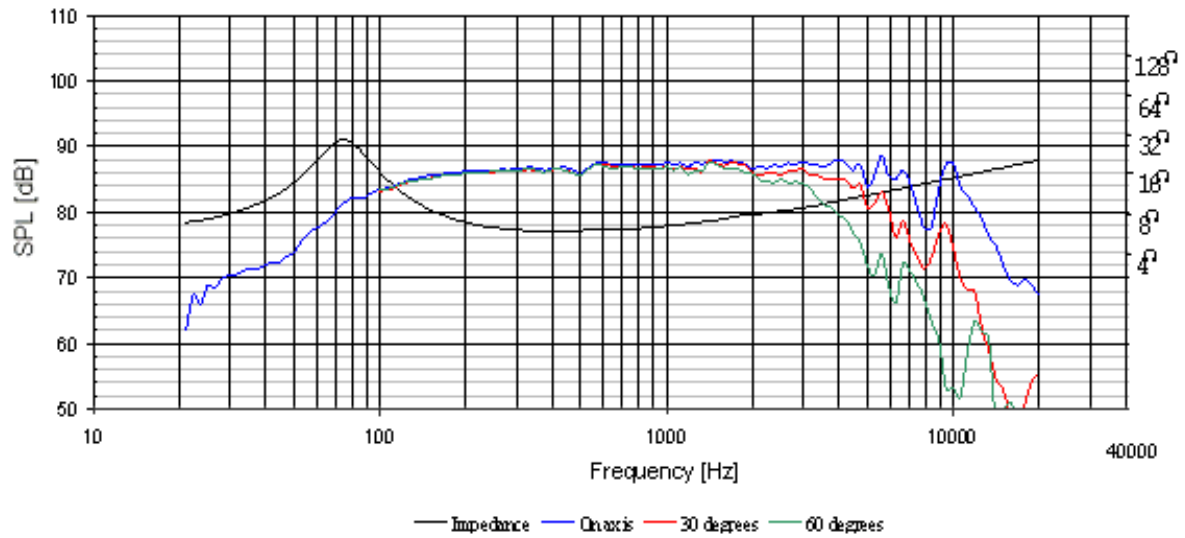

## Mechanical Dimensions:

