



12AX7LPS

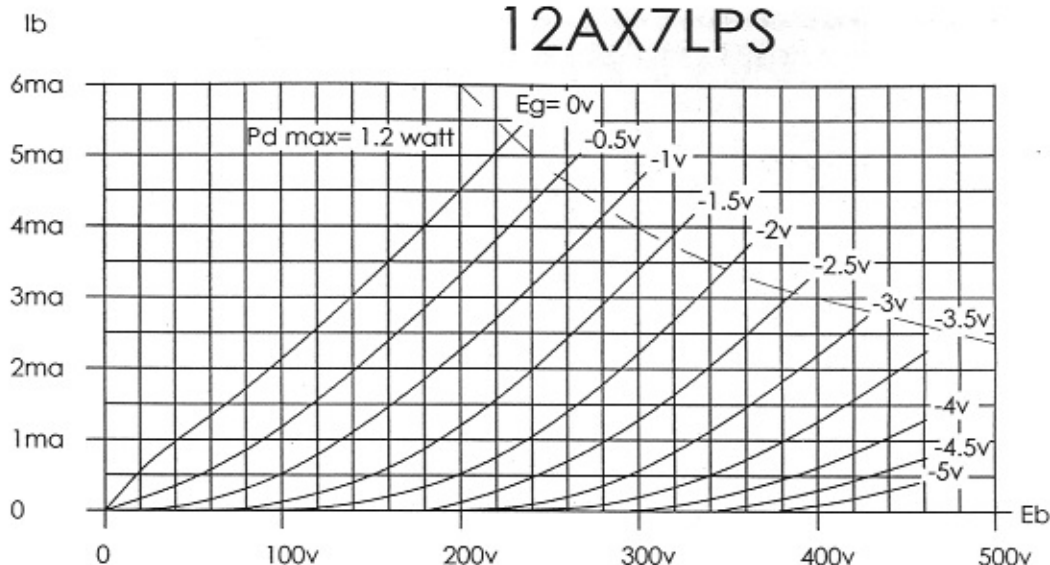

The 12AX7LPS is a high μ dual triode with a spiral filament. The lower ac stray-field sensitivity, combined with excellent linearity, make for a superior 12AX7 replacement.



Pin #	description
1	plate 2
2	grid 2
3	cathode 2
4,5,9	heater
6	plate 1
7	grid 1
8	cathode 1

Electrical Data	
Heater Voltage, not less than	6.0 or 12.0 V
Heater Voltage, not more than	6.6 or 13.2 V
Plate Voltage, not more than	330 V
Heater to Cathode Voltage:	
positive, V not more than	200 V
negative, V not less than	200 V
Plate Current, not more than	9 mA
Plate Dissipation, each triode, not more than	1.2 watts
Maximum grid circuit resistance:	
fixed bias, not more than	1 Mohm
self bias, not more than	2.2 Mohm
Amplification Factor (nominal)	94
Transconductance (nominal)	1.7 mA/V
Plate Resistance (nominal)	56.0 K OHM
Inter-electrode Capacitances:	
C, grid to plate	1.7 pF (triode 1 and 2)
C, grid to cathode and heater	1.6 pF (triode 1 and 2)
C, plate to cathode and heater	0.46 pF (1) and 0.38 (2)
C, cathode to heater	5.0 nF (nominal)
C, plate to plate	600 pF
Measured Electrical minima:	
Grid reverse current, not more than (see note below)	0.2 μ A
Plate current, not less than (see note below)	0.75 mA
Plate current (Eb= 250V, Ec= -4V)	10 μ A
Transconductance, not less than (see note below)	1.4 mA/V
Amplification Factor, not less than (see note below)	78

NOTE: heater V, 12.6vac; plate V, 250v; grid bias, -2v; grid circuit resistance, 1K ohm

12AX7LPS SOVTEK

NEW SENSOR CORP.

tested by jcm

Drawing #
GT001

Drawn by:

jcm