

SD215A-88

8" DVC Subwoofer





Features

- 8" heavy duty paper cone
- Durable rubber surround
- Dual 8 ohm voice coils
- High power motor structure
- Long-throw design
- Well suited for both sealed and vented designs

Parameters


Impedance (Ω)	4
Re (Ω)	3.20
Le (mH) @ 1 kHz	1.16
Fs (Hz)	31.0
Qms	3.10
Qes	0.45
Qts	0.39
Mms (g)	42.4
Cms (mm/N)	0.62
Sd (cm ²)	208.7
Vd (cm ³)	125.2
BL (Tm)	7.7
VAS (liters)	38.2
XMAX (mm)	6.0
VC Diameter (mm)	38.5
SPL (dB@1W/1m)	85.9
RMS Power Handling (w)	80
Usable Frequency Range (Hz)	31 - 2,500

Note: All specifications are with voice coils connected in parallel.

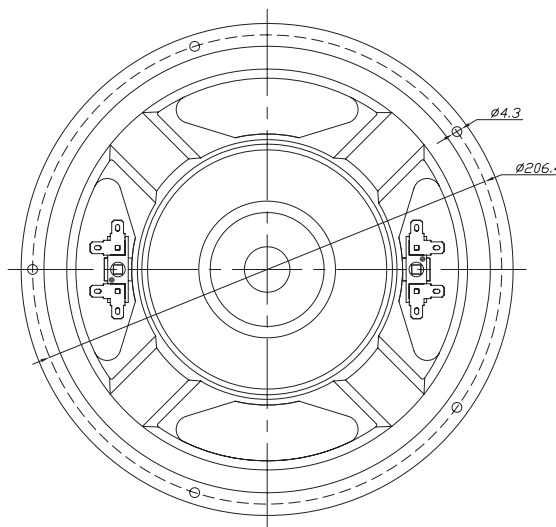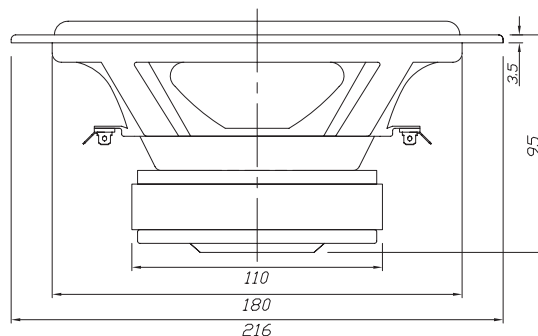

Note: All dimensions in mm.

Frequency Response

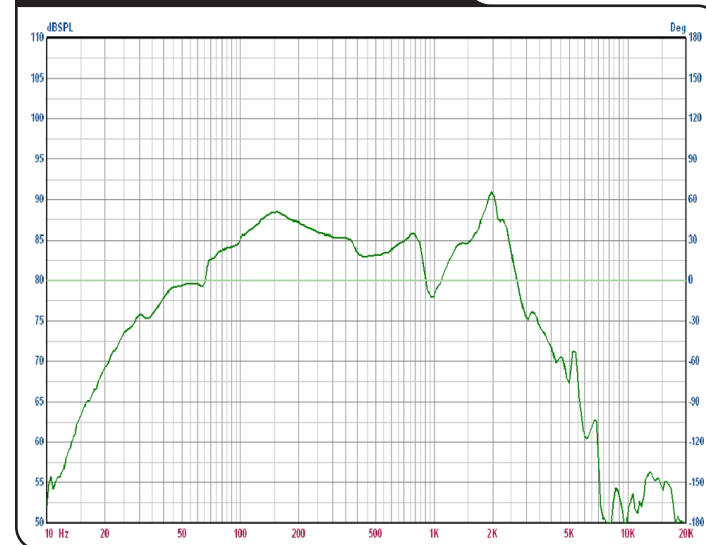

Impedance/Phase

