


560L

P.C. BOARD MOUNT - EPOXY POTTED AUDIO TRANSFORMER

- Rugged black epoxy potted case with 9 pin connections (0.25" square by 0.5" long)
- Higher signal levels possible with reduced low frequency performance
- Electrostatic shield between primary & secondary connected to core and pin "SH"
- Humbucking construction
- Balanced split windings on primary & secondary for circuit versatility
- Primaries and secondaries can be reversed for impedance matching
- Overall dimensions 1.64" x 1.33" x 0.85" high max
- Shipping weight 4 oz

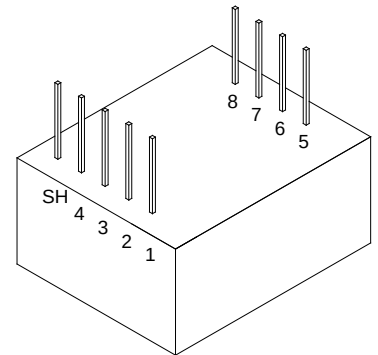


Power level: 0dbm @ 30 Hz. to 30 Khz.

-Freq. range @ +0 dbm is 30 Hz. to 30 Khz. +/- 1.0db max

-Freq. range @ +10 dbm is 30 Hz. to 30 Khz.


-Freq. range @ +27 dbm is 30 Hz. to 30 Khz.

-Freq. measurements with no D.C. saturation.




ELECTRICAL SPECIFICATIONS


Characteristic	Typical
Input Impedance	150/600 Ω
Output Impedance	5/20 K Ω
Output Power	0 dbm
DCR	
Primary 1-4	15.80 Ω
Secondary 5-8	336.0 Ω
Inductance	@ 1.0 kHz, 1.0 V OC
Primary	0.798 H
Secondary	24.50 H
Leakage Inductance	0.531 mH
Impedance	@ 1.0 kHz, 1.0 V OC
Primary	10.54 K Ω
Secondary	288.0 K Ω
Frequency Response	± 1.0 db from 30Hz to 30KHz
Turns ratio	5.774:1
Dielectric Strength	500 Vrms
Temperature Range	-40 To 105°C**

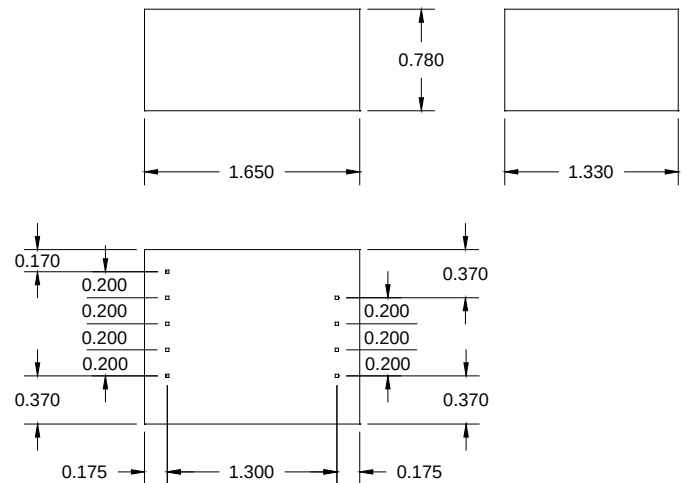


SCHEMATIC DIAGRAM

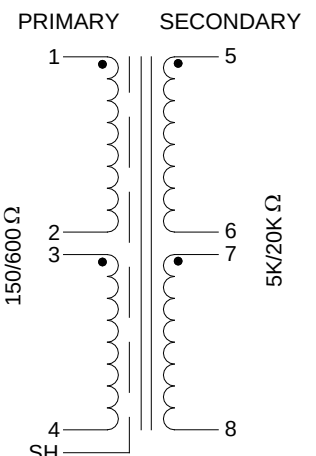


PCB LAYOUT

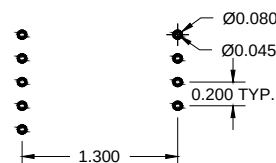


560L Rs=600 RI=20K Frequency Response
Winding Series Connected

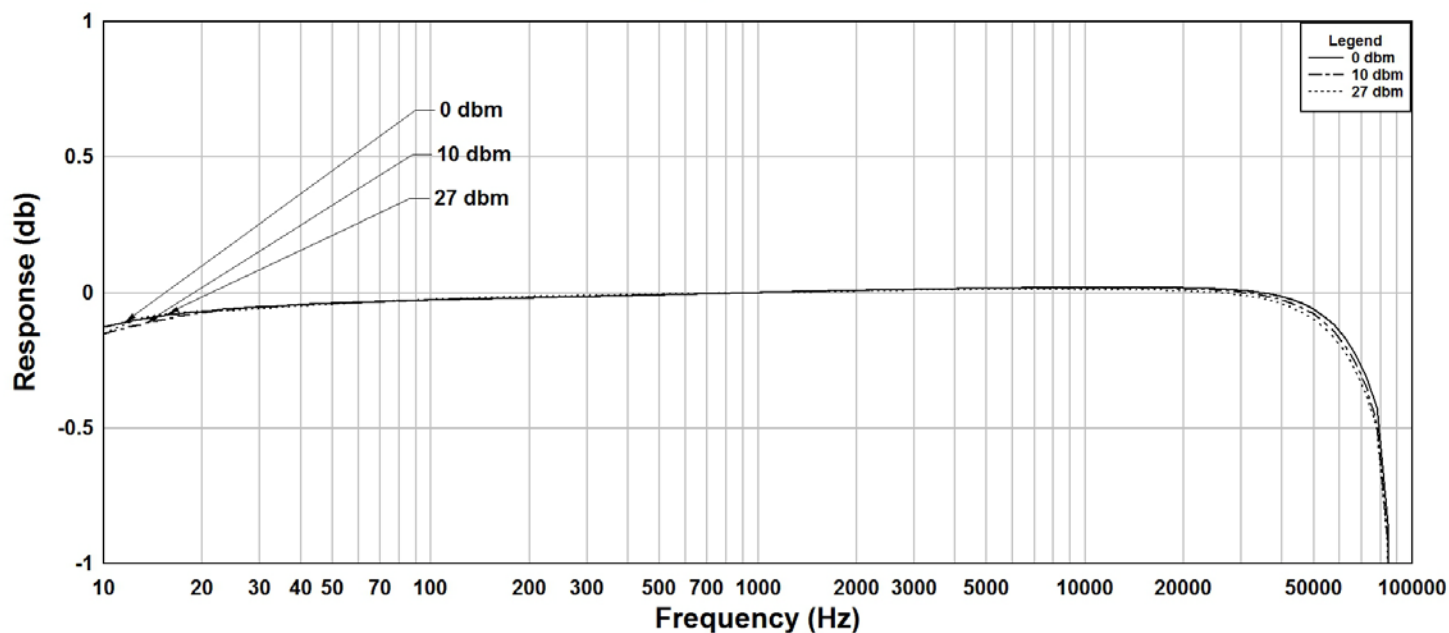

560L Rs=600 RI=20K Phase Shift
Winding Series Connected

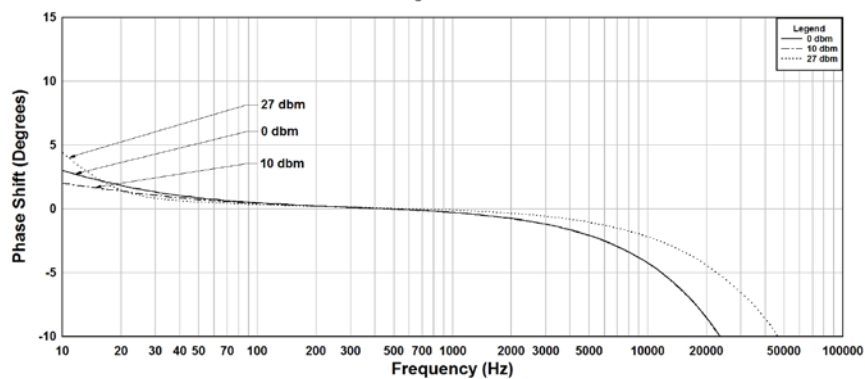


560L Rs=600 RI=20K THD+N
Winding Series Connected

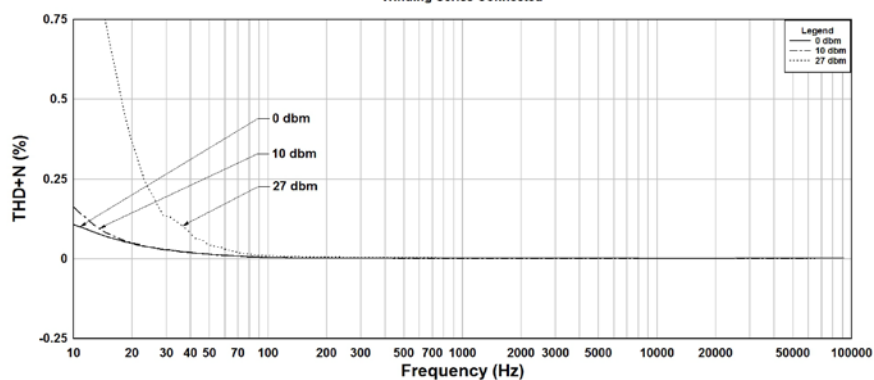


**The epoxy that is used to cast these parts has a workable temperature range of -40°C to +105°C Under a normal rate of change, this does not include thermal shock. Variations in the transformer materials and environmental conditions may reduce the workable temperature range.

This drawing and the information in it is the property of Hammond Manufacturing. It may not be reproduced, transmitted or used in any manner whatsoever without the written permission of Hammond Manufacturing. Data subject to change without notice.


560L Rs=150 Rs=5K Frequency Response Winding Parallel Connected

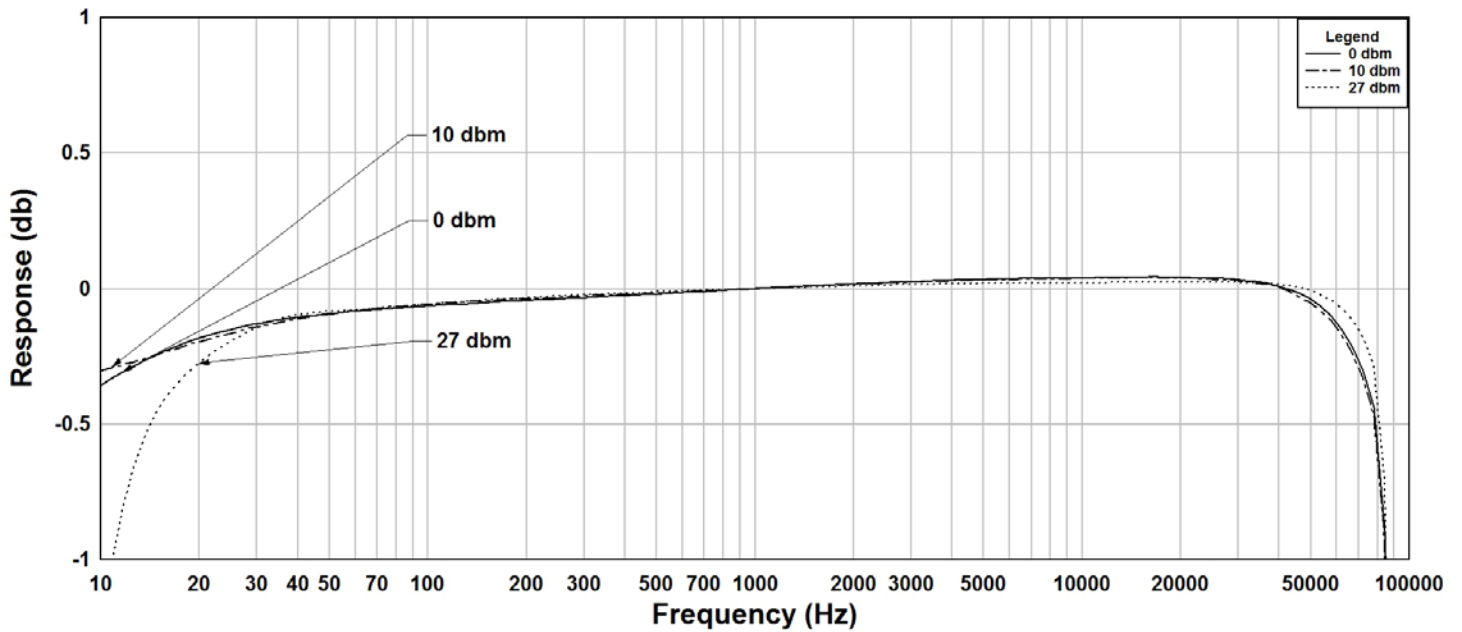

560L Rs=150 RI=5K Phase Shift Winding Parallel Connected

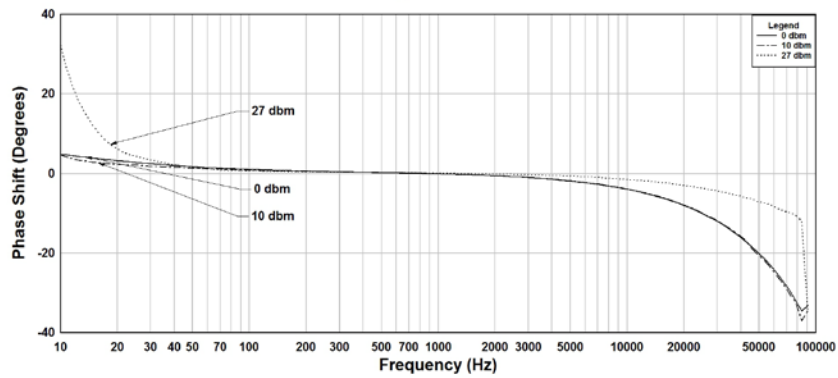

560L Rs=150 RI=5K THD+N Winding Parallel Connected

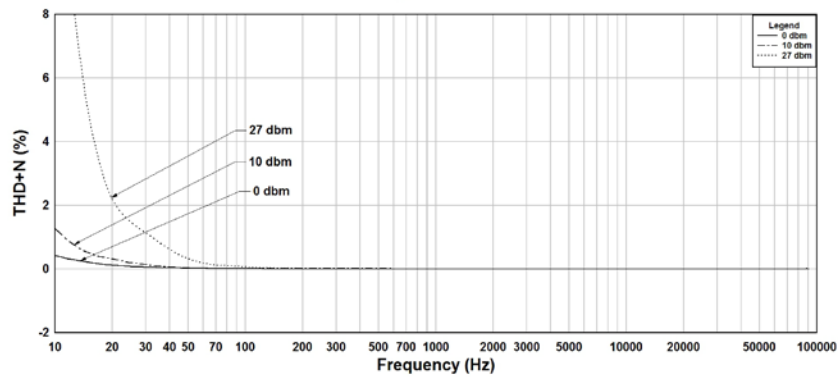

TYPICAL TEST CIRCUIT

Measurement instruments
Hp4192a impedance analyzer
Hp3456a DVM
Keithley 2002 DVM
D scope series iii audio analyzer

