


PHT1-6

Planar Horn Tweeter 6 Ohm



Features

- Lightweight Kapton diaphragm with rugged etched conductor
- Powerful neodymium magnets
- Optimized injection-molded horn flare
- Extruded aluminum rear heatsink
- Detailed, non-fatiguing reproduction
- High power handling

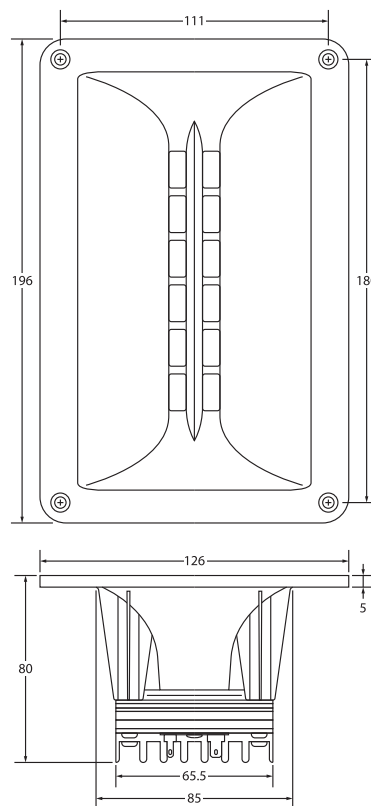


Note: All dimensions in mm.

Parameters

Impedance (Ω)	6
Re (Ω)	5.77
Le (mH) @ 1 kHz	0.17
Fs (Hz)	—
Qms	—
Qes	—
Qts	—
Mms (g)	—
Cms (mm/N)	—
Sd (cm ²)	—
Vd (cm ³)	—
BL (Tm)	—
VAS (liters)	—
XMAX (mm)	—
VC Diameter (inch)	N/A
SPL (dB 2.83V/1m)	105
RMS Power Handling (W)	80
Usable Frequency Range (Hz)	2,800-18,000

Frequency Response

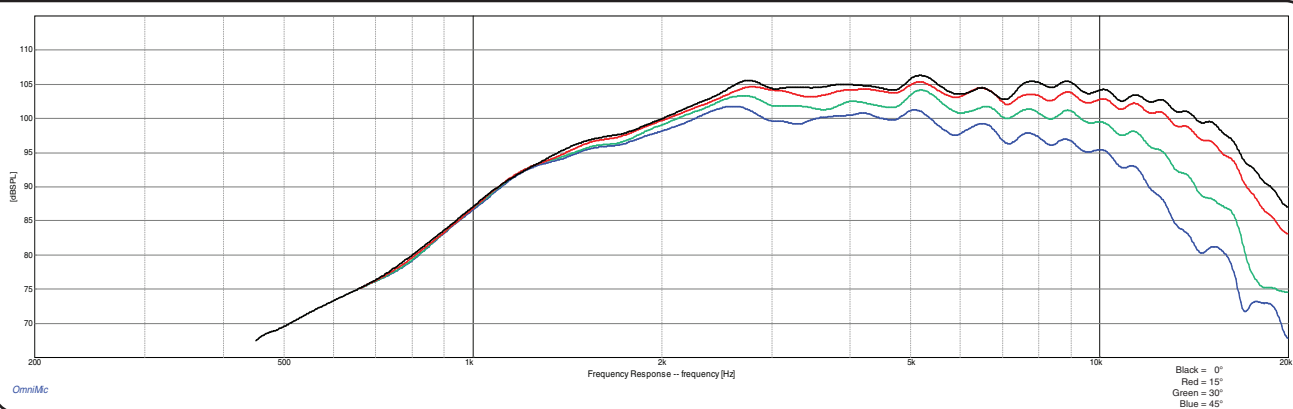

Impedance/Phase

