

6FHX51

Coaxials - 6.5 Inches

300 W continuous program power capacity
 70°x70° nominal coverage
 85 - 18000 Hz response
 93 dB sensitivity



Specifications

Nominal diameter	170 mm (6.5 in)
Nominal impedance	8 Ω
Minimum impedance lf	6.5 Ω
Minimum impedance hf	7.0 Ω
Frequency range	85 - 18000 Hz
Dispersion angle ¹	70x70 °
Magnet material	Ceramic

Specifications LF Unit

LF Sensitivity ²	93.0 dB
LF Nominal Power Handling ³	150 W
LF Continuous Power Handling ⁴	300 W
LF Voice Coil Diameter	51 mm (2.0 in)
LF Winding Material	Copper

Specifications HF Unit

HF Sensitivity ⁵	108.5 dB
HF Nominal Power Handling ⁶	10 W
HF Continuous Power Handling ⁷	20 W

Specifications HF Unit

HF Voice Coil Diameter	25 mm (1.0 in)
HF Winding Material	Aluminium
Diaphragm material	Polyester
Recommended crossover ⁸	2.5 kHz

Parameters

Fs	85 Hz
Re	5.5 Ω
Qes	0.4
Qms	7.8
Qts	0.37
Vas	5.0 dm ³ (0.18 ft ³)
Sd	132.0 cm ² (20.5 in ²)
η _o	0.83 %
Xmax	5.0 mm
Xvar	5.7 mm
Mms	16 g
Bl	11.3 Txm
Le	1.0 mH

Parameters

EBP	212 Hz
-----	--------

Mounting And Shipping Info

Overall diameter	187 mm (7.4 in)
Bolt circle diameter	172 mm (6.7 in)
Baffle cutout diameter	146 mm (5.75 in)
Depth	122 mm (4.8 in)
Flange and gasket thickness	12 mm (0.47 in)
Net weight	2.7 kg (5.9 lb)
Shipping units	1
Shipping weight	3.05 kg (6.72 lb)
Shipping box	321x294x190 mm (12.6x11.6x7.5 in)


Service Kit

Service kit lf	RCK06FHX518
Replacement diaphragm	MMDDE58

1. Included by -6 dB down points.
 2. Applied RMS Voltage is set to 2.83V.
 3. 2 hours test made with continuous pink noise signal (6 dB crest factor) within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.
 4. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

5. Applied RMS Voltage is set to 2.83V.
 6. 2 hour test made with continuous pink noise signal (6 dB crest factor) within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance. Loudspeaker in free air.
 7. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
 8. 12 dB/oct. or higher slope high-pass filter.

6FHX51 LF directivity map

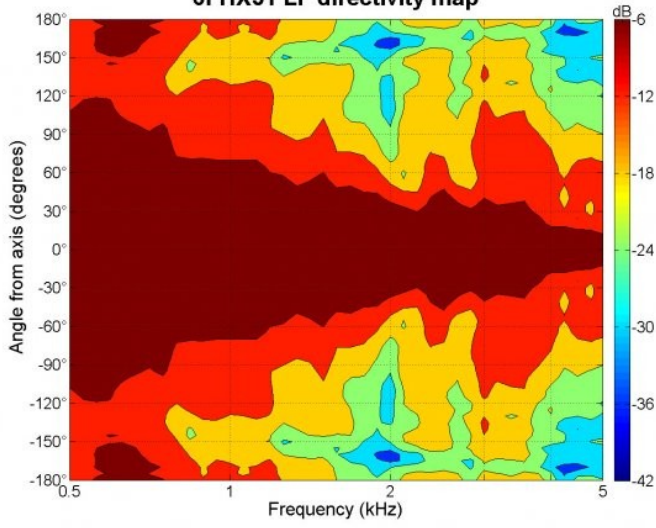

6FHX51 HF directivity map

