


PA SERIES

W5-1367A

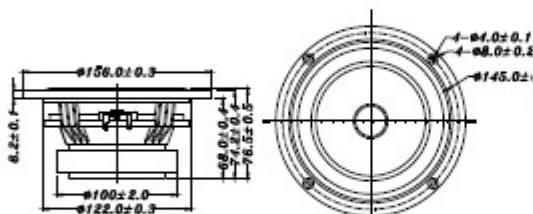

- PAPER CONE WITH CERAMIC POWDER TREATMENT
- HIGH INTERNAL LOSS RUBBER SURROUND
- DIE CAST BASKET
- ALUMINUM PHASE PLUG COOLING

5" PAPER WOOFER



DIAPHRAGM MTL	Paper
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8Ω
DCR IMPEDANCE	6.8Ω
SENSITIVITY 1W/1m	88dB
FREQUENCY RESPONSE	50 - 6K Hz
FREE AIR RESONANCE	50 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	6 mm
NOMINAL POWER	28 W
MUSIC POWER	56 W
FORCE FACTOR, BL	6.62 T/M
MAGNET WEIGHT	(2.1 oz) 600 g
MOVING MASS	8.98 g
FERRIFLUID ENHANCED	No
SUSPENSION COMPLIANCE	11.60 MN ⁻¹
EFFECTIVE PISTON AREA	0.0094 m ²
Levc	0.156 mH
Zo	90 ohm
X-max	3.25 mm
Vas	14.55 Liter
Qts	0.39
Qms	5.15
Qes	0.42

TB SPEAKERS

VOICE: 886 226570282 FAX: 886 226580166
E-MAIL: info@tb-speaker.com